



## Mounting Instruction Triumph Classic Dash Board (309014)



Installation time : 150 minute

Tools requirement:

- 1) Allen wrench 4 mm.
- 2) Open-end box 8 mm.
- 3) warmed gun
- 4) Screwdriver set
- 5) Medium Thread Locker




Telefono 0039 (0) 445-390437  
Fax 0039 (0) 445-395539

Email [info@freespirits.it](mailto:info@freespirits.it)  
Site: [www.freespirits.it](http://www.freespirits.it)

# ATTENTION !

Disconnect the negative battery terminal

## FOR SINGLE INSTRUMENT MODELS

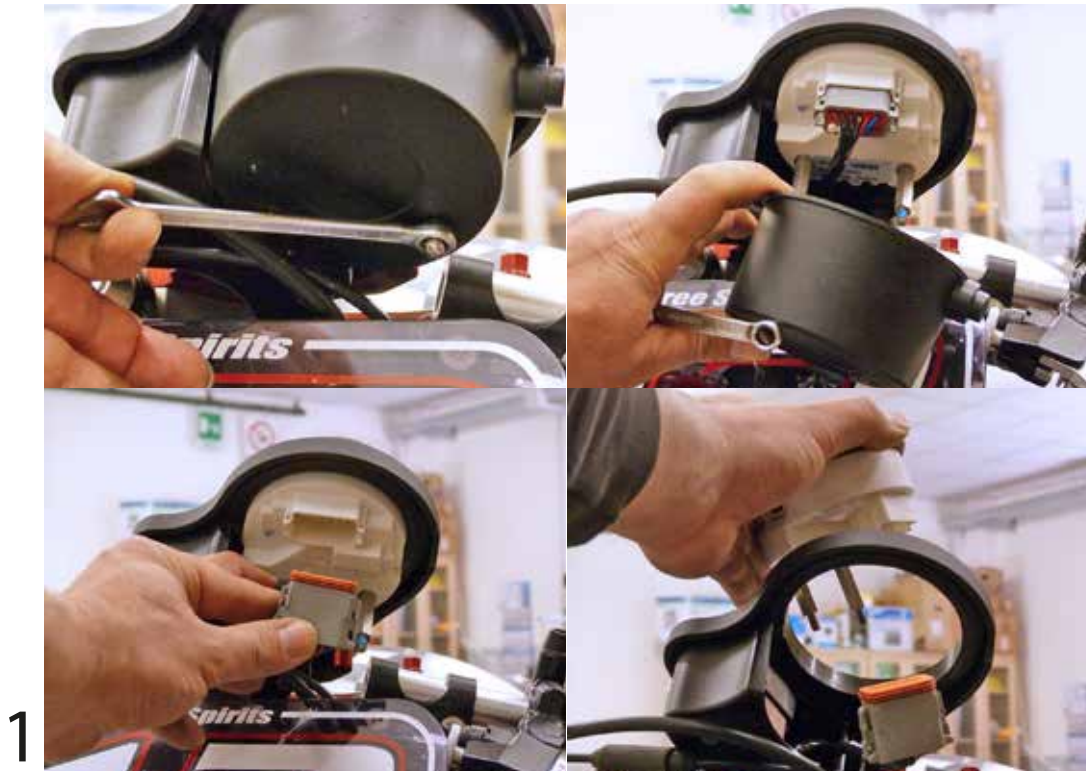

Remove the shell of the speedometer.  
Disconnect the plug and remove the speedometer.



Remove the bracket and the shell as shown.  
Pull the plug.



# FOR MODELS WITH REV COUNTER



3

Remove OEM bracket and shell.



4

Pull the plug and remove instruments.



5

Apply O-ring on speedometer.



6


Insert ORing on m6x60 buttonhead screws.  
 Insert the screws on brackets as picture.  
 Apply other four ORing and insert spacers.






7

Mount the brackets on the original plate.  
Insert speedometer.

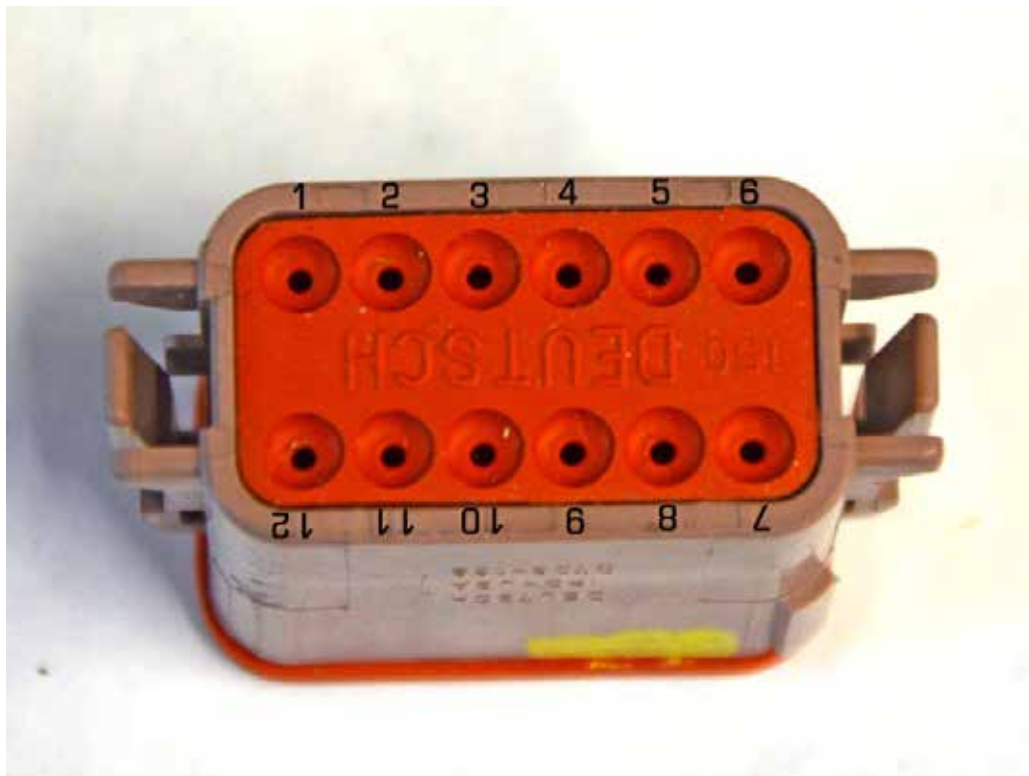


8

Pay close attention to the numbers on the "Brown" plug and the drawing on page 8 will be useful to proceed with the installation.

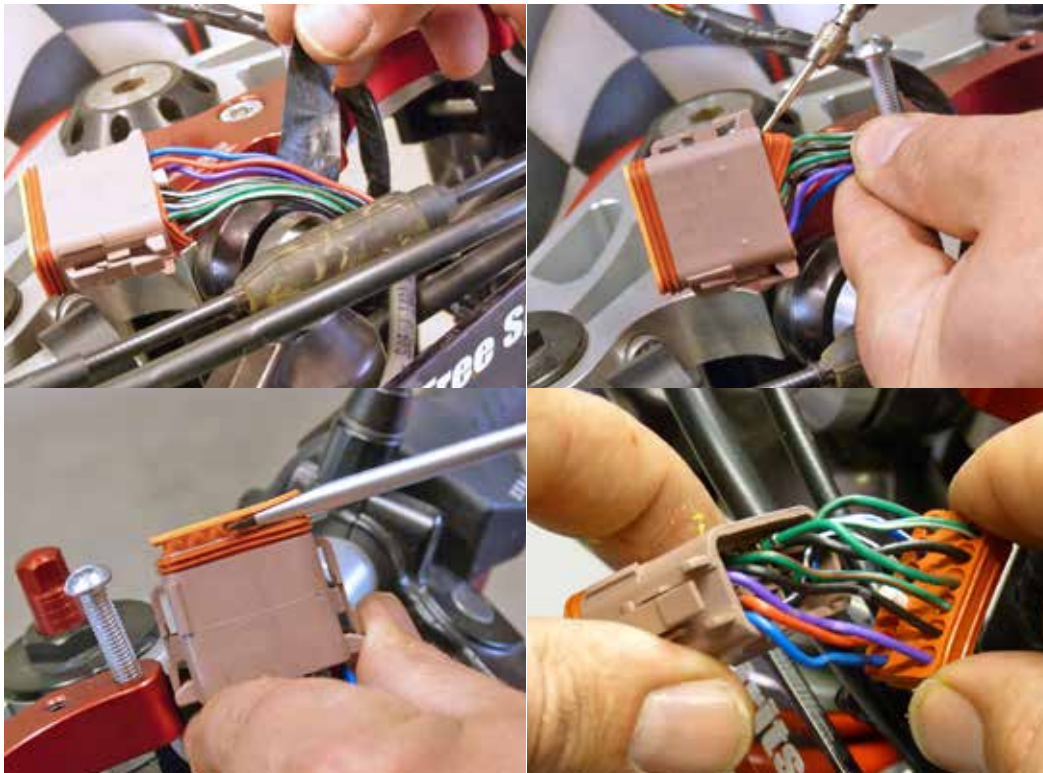

9

Slide off the gasket and the front cap of the plug.

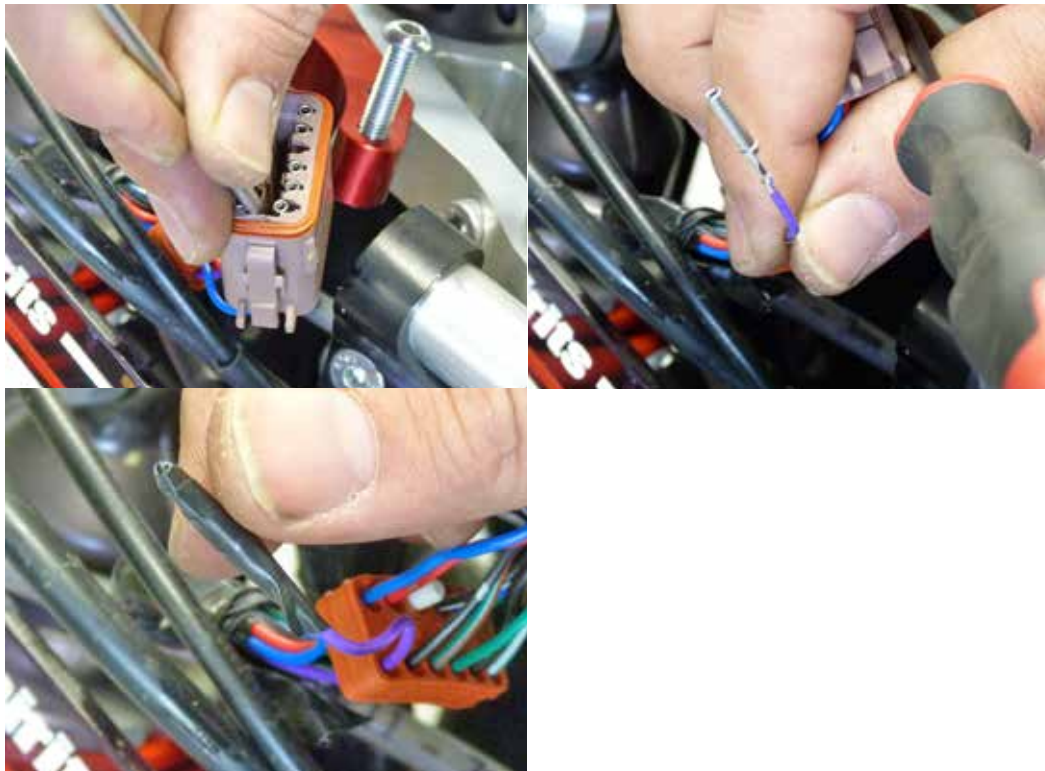


10

With a small screwdriver remove the connectors from the plug.


First remove the wires that will not be used, and isolate (example purple wire) always refer to page 8



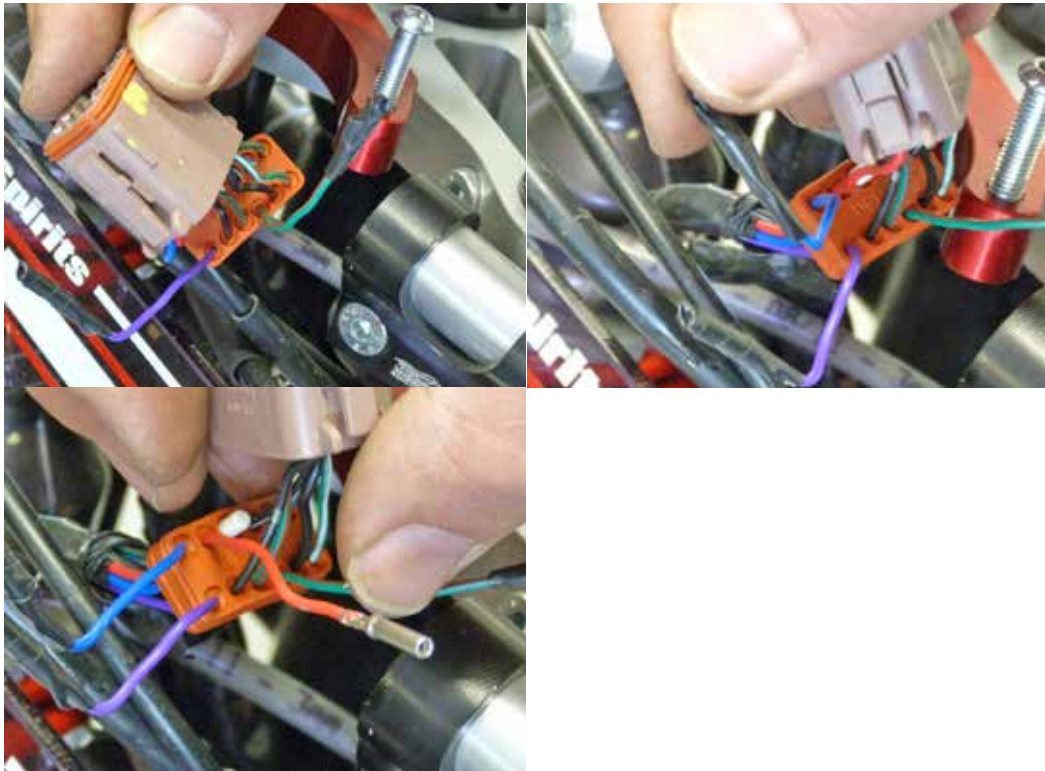



11

Proceed with the wires 4 red / green, 12 blue, 11 red.  
See Page 8.

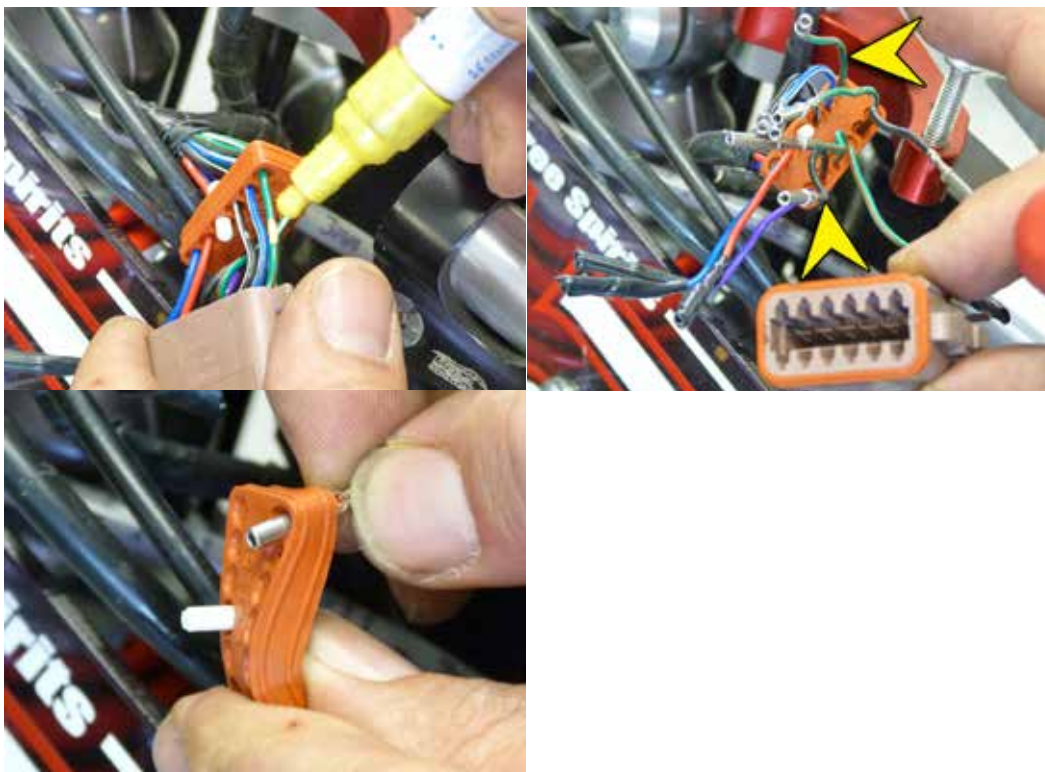


12

Mark the wires: 7 red / green, 2 Black for not to confuse  
them with others of similar color.  
Slide off the remaining wires from the gasket.

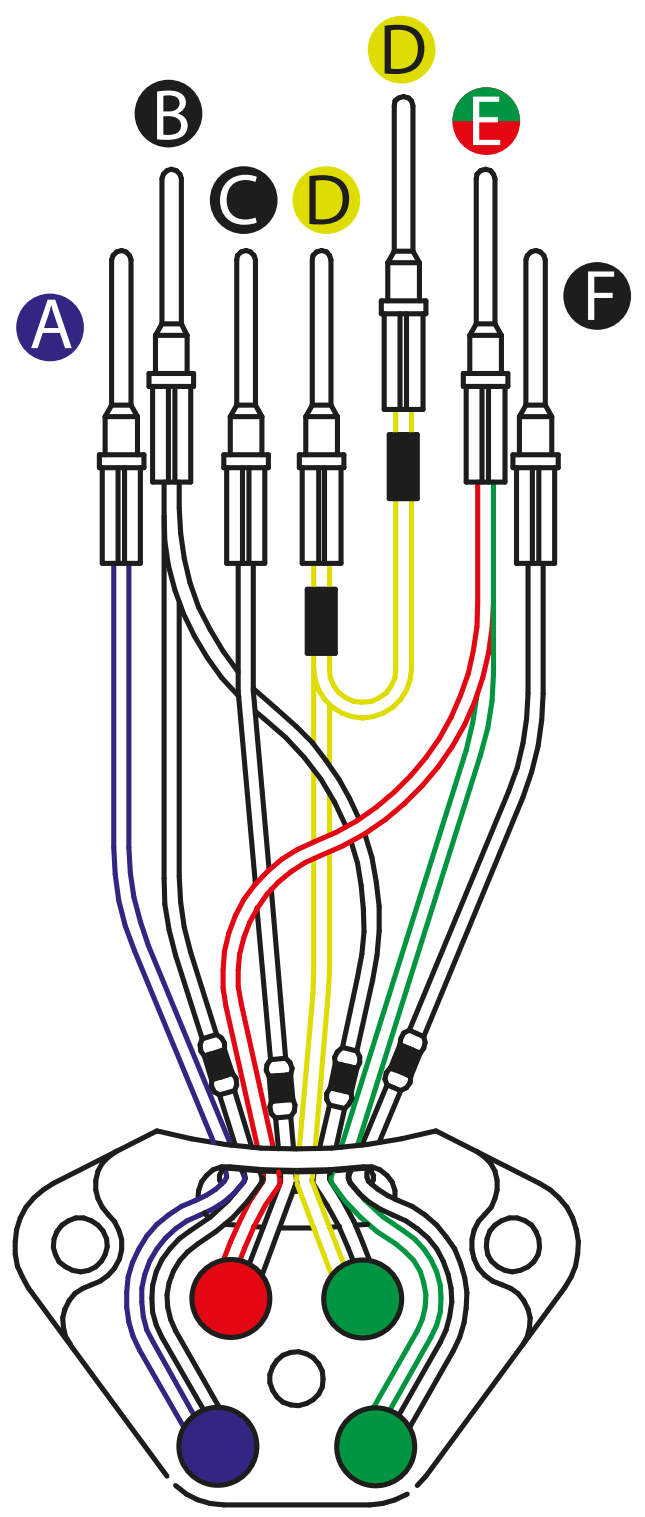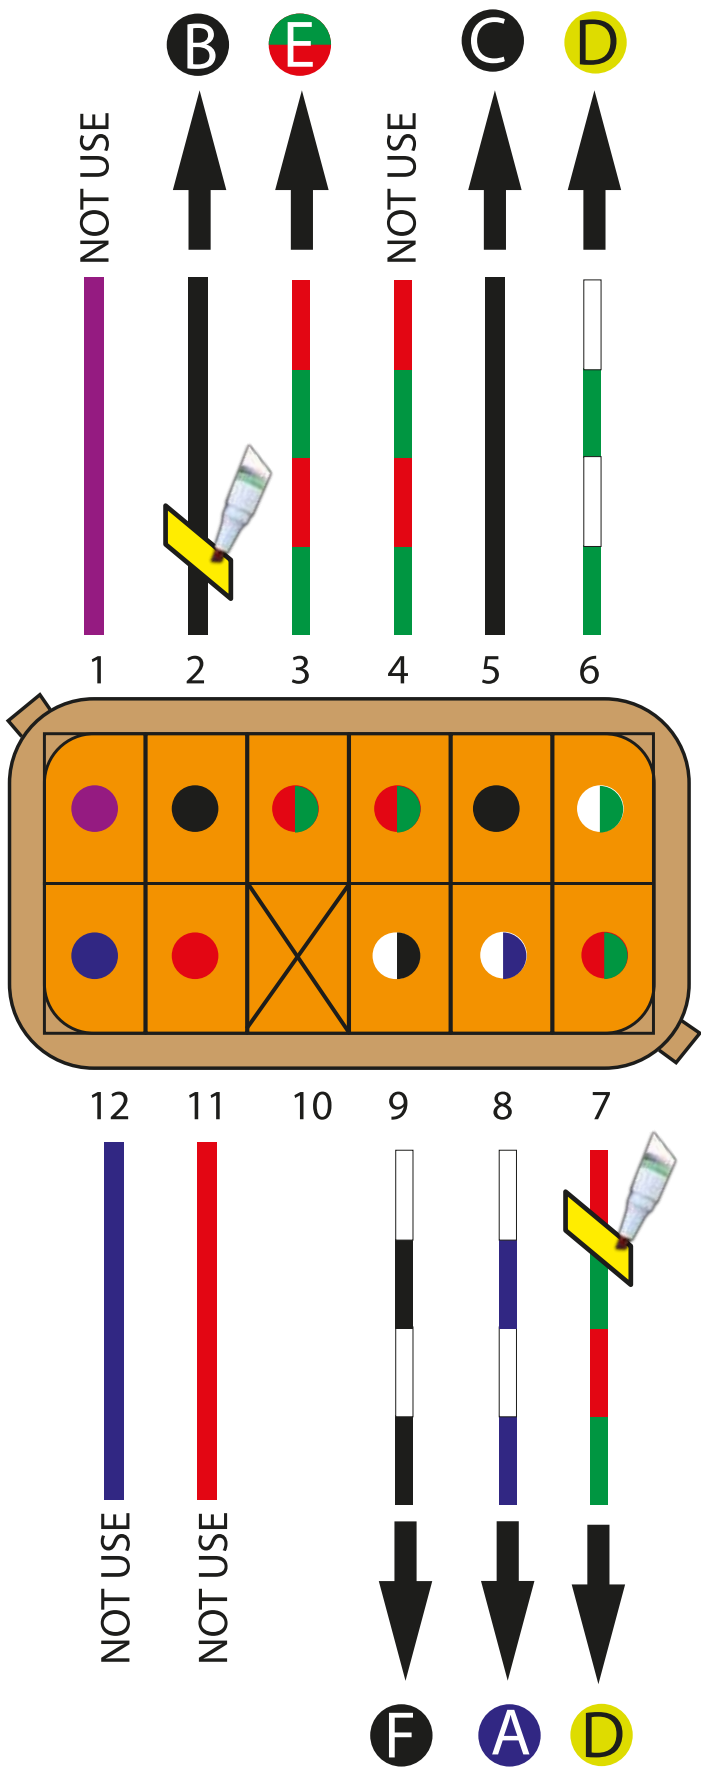




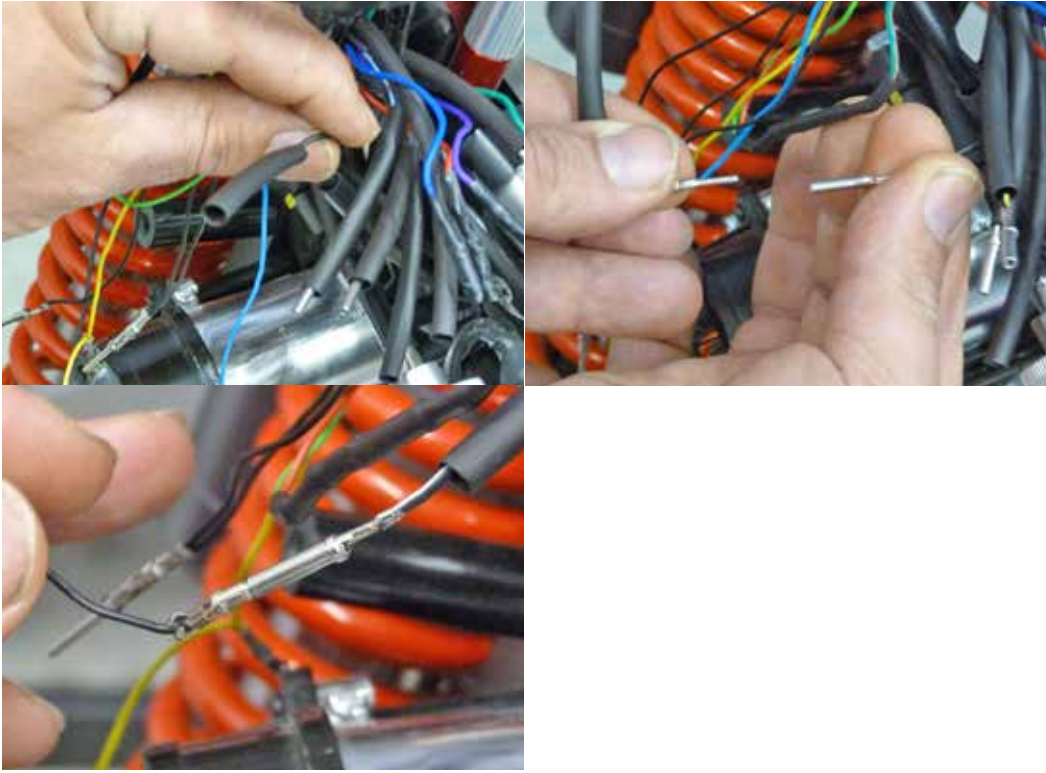


13

Slide shrink tubing on uninsulated wires.  
Now connect the pins of the new instrument panel,  
following the diagram on p. 8.

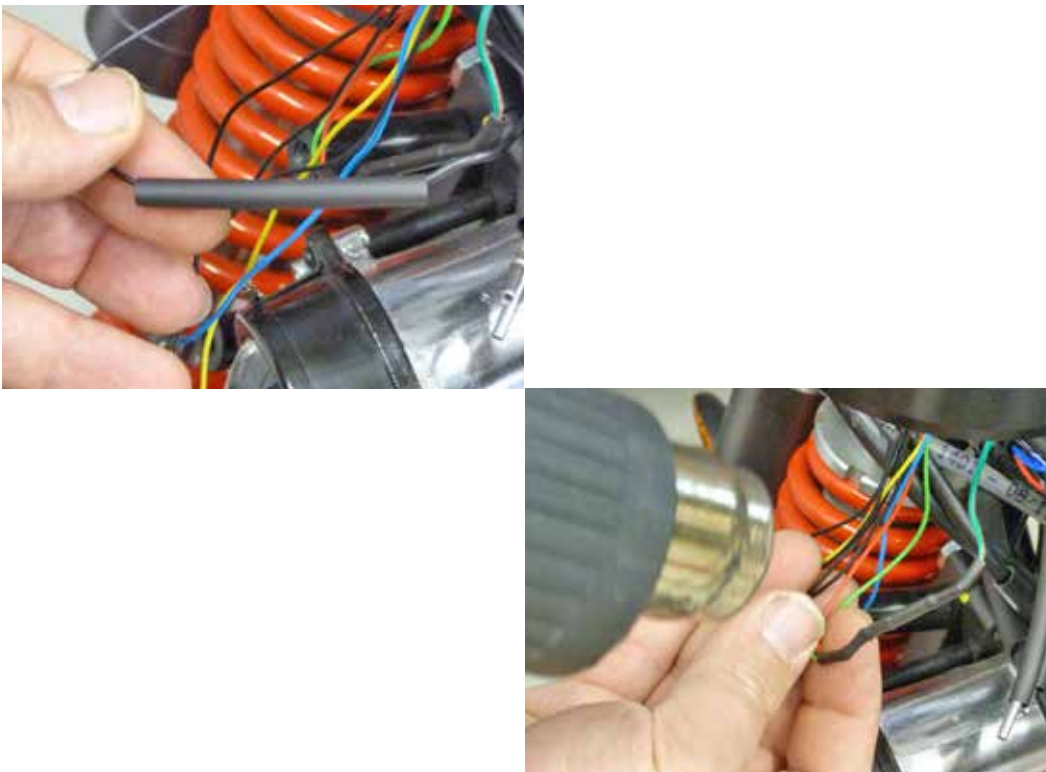

14

Once connected all the plugs warm up to block and  
isolate all.

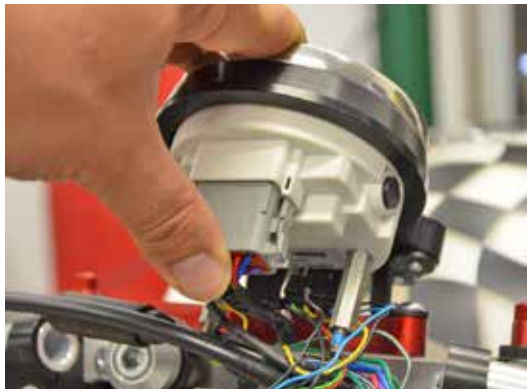

15

Insert the gray plug on the speedometer.  
Place wiring underneath the speedometer




16

Put the cover underneath the speedometer.  
Apply thread lock medium to the oem nuts.  
Tighten the nuts up to support the plastic shell  
without forcing it.  
Wait 15 to 45 minutes. before operating the vehicle.





# Classic Speedo Bracket

## Code 309014

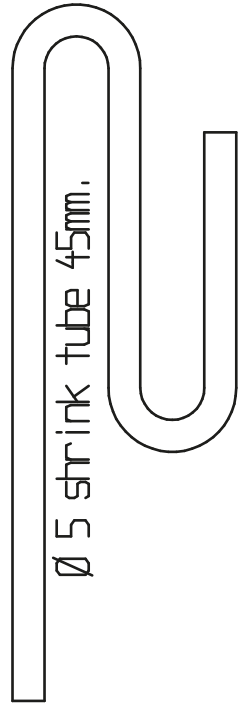

309014 A

Bottomhead M6x60

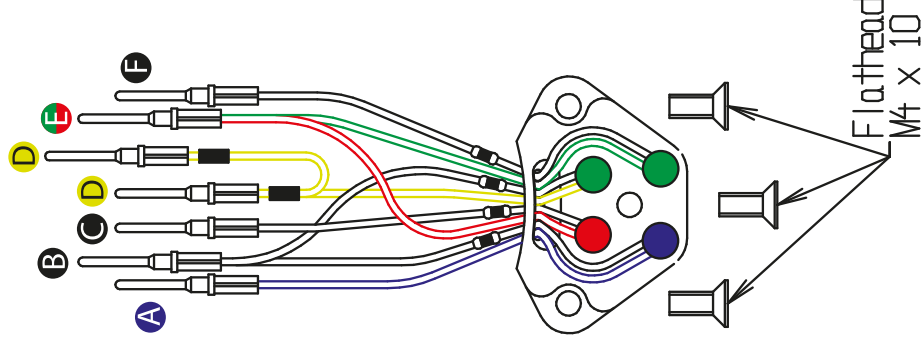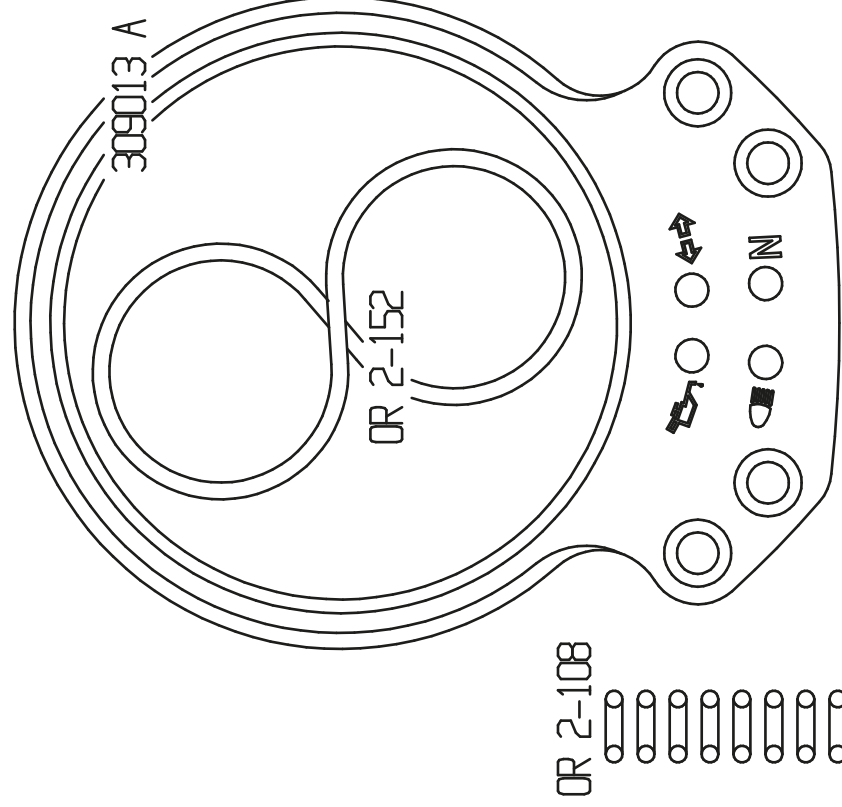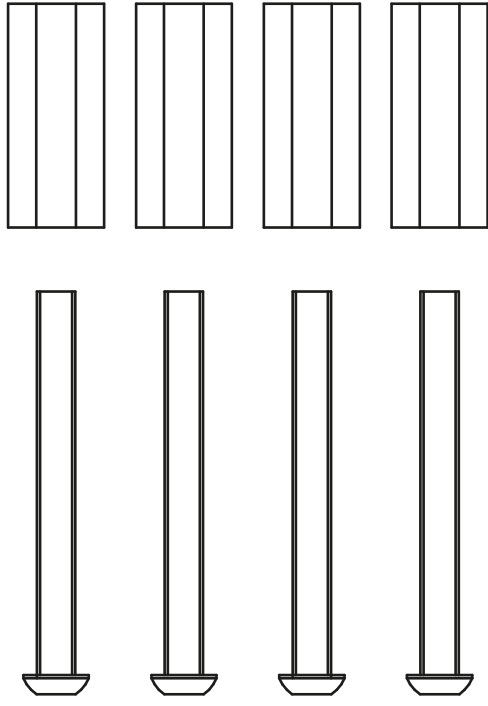





With the shipment of the order the buyer accepts the following conditions

#### **Warranty**

1. The SELLER warrants, for a period of twelve months after the date of delivery of the PRODUCTS to the BUYER, that the PRODUCTS are free from defects in manufacture and/or design which make the PRODUCTS unsuitable for the use for which the SELLER expressly represented to the BUYER the PRODUCTS are intended.

2 The SELLER shall be released from the guarantee in case the BUYER has misused, altered or modified the PRODUCTS without the consent of the SELLER, or has failed to communicate, via registered mail, the defects of the PRODUCTS or the lack of conformity thereof.

3 The SELLER shall be released from any responsibility if :

- a) the replacement and/or the repair of the PRODUCTS is to be accounted to force majeure events, as described under article 7 below, or the BUYER's, or its clients', fault or negligence; or
- b) the PRODUCTS, or parts thereof, have been misused or mishandled by the BUYER or its clients.

4 The SELLER shall be entitled to withdraw any defective PRODUCTS from the market, at its own expenses, and to obtain, to the extent it is possible, the BUYER's assistance in this respect

5 Such with the exception of fraud, the SELLER shall be responsible exclusively for repairing and/or replacing any PRODUCTS which are defective and/or not complying with the order. For this purpose is made prior obligation to the BUYER, on penalty of forfeiture to the warranty:

- a) To report in writing to the seller by registered letter with acknowledgment of receipt the presence of the reported flaws within eight days of delivery of PRODUCTS or within eight days of discovery of the defects themselves if hidden;
- b) To return at his own expense to the SELLER, warehouse , any defective products , in order to allow the verification of the presence of defects or inefficiency by the seller's quality control.

6 In no event shall the SELLER's liability of any kind include any damages to persons or property or any indirect, incidental or consequential losses which may have been caused to the BUYER or third parties by any defects or lack of conformity of the PRODUCTS

#### **Claims**

-We check carefully and we pack accurately our goods before shipment. All claims due to damage or loss during the transport must be passed directly from the buyer to the courier that made delivery.

Consequently it is important that the buyer opposes terms on the relative bill of lading, so as he could receive possible reimbursements.

-Free Spirits srl company is not responsible for damages during transport.

#### **Final revisions**

-Free Spirits srl company has got no connection with Harley-Davidson, Buell and Triumph brands. They are used only as references.

-The BUYER declares to be completely informed that some PRODUCTS in this catalogue could not comply with the Italian Traffic Code or with the Traffic Code of other Countries. The buyer takes charge of any installation on motorcycles which circulate on open traffic roads.

-Free Spirits srl company declines any responsibility with the wrong use of its accessories.

To read " Terms of Service" visit our website: <http://www.freespirits.it>

